



M SERIES
/ MILTON
/ INDUSTRIAL

LEOUYN
LEOUYN ENTERPRISE CO., LTD.

M SERIES (MILTON / INDUSTRIAL) SAFETY COUPLER

- One-push connection
- Safety design
- Compatible with M-Series plugs (M13, M12, M11, M10)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
M32-F2	1/8" NPF	69.5	19	12
M32-F4	1/4" NPF	69.5	19	14
M32-F6	3/8" NPF	70.5	19	15
M32-F8	1/2" NPF	72.5	22	16



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
M32-M2	1/8" NPT	71	19	10	5
M32-M4	1/4" NPT	74	19	13	7
M32-M6	3/8" NPT	75	19	14	8
M32-M8	1/2" NPT	77	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M32-T4	1/4"	83.5	19	22.5	4
M32-T5	5/16"	83.5	19	22.5	6
M32-T6	3/8"	89.2	19	28.2	7.5
M32-T8	1/2"	92.5	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M32-H4	1/4"	89.5	19	28.5	4.5
M32-H5	5/16"	91	19	30	5
M32-H6	3/8"	92.5	19	31.5	7.5
M32-H8	1/2"	94	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
M32-P2	4 x 6	73	19	12	12	3
M32-P4	5 x 8	76	19	14	15	4
M32-P6	6.5 x 10	79.5	19	16	18.5	5
M32-P8	8 x 12	78.5	19	17	17.5	6.5

M SERIES (MILTON / INDUSTRIAL) ONE-TOUCH COUPLER

- One-push connection
- Compatible with M-Series plugs (M13, M12, M11, M10)



	MODEL	Female Thread T	DIMENSIONS(mm)		
			L	H	A
	T21-F2	1/8" NPF	52.2	19	12
	T21-F4	1/4" NPF	54.2	19	14
	T21-F6	3/8" NPF	58.2	21	15
	T21-F8	1/2" NPF	59.2	24	16



	MODEL	Male Thread T	DIMENSIONS(mm)			
			L	H	A	ØB
	T21-M2	1/8" NPT	55.7	19	10	5
	T21-M4	1/4" NPT	58.7	19	13	7.5
	T21-M6	3/8" NPT	59.7	19	14	10.5
	T21-M8	1/2" NPT	61.7	21	16	12



	MODEL	Hose Barb T	DIMENSIONS(mm)			
			L	H	A	ØB
	T21-T4	1/4"	68.2	19	22.5	4
	T21-T5	5/16"	68.2	19	22.5	6
	T21-T6	3/8"	73.9	19	28.2	7.5
	T21-T8	1/2"	77.2	19	31.5	9



	MODEL	Hose Barb T	DIMENSIONS(mm)			
			L	H	A	ØB
	T21-H4	1/4"	74.2	19	28.5	4.5
	T21-H5	5/16"	75.7	19	30	5
	T21-H6	3/8"	77.2	19	31.5	7.5
	T21-H8	1/2"	78.7	19	33	9



	MODEL	Hose T	DIMENSIONS(mm)				
			L	H1	H2	A	ØB
	T21-P2	4 x 6	57.7	19	12	12	3
	T21-P4	5 x 8	60.7	19	14	15	4
	T21-P6	6.5 x 10	64.2	19	16	18.5	5
	T21-P8	8 x 12	63.2	19	17	17.5	6.5

M SERIES (MILTON / INDUSTRIAL) DUAL BALL-SWIVEL PLUG


- 360-degree rotation for maximum mobility
- Free rotation angle up to 54 degrees
- Dual swivel points for flexible movement
- Compatible with M-Series couplers (M32, M21)



	MODEL	Female Thread T	DIMENSIONS(mm)		
			L	H	A
	M13-F2	1/8" NPF	75.1	19	12
	M13-F4	1/4" NPF	75.1	19	14
	M13-F6	3/8" NPF	76.1	21	15
	M13-F8	1/2" NPF	78.1	24	16.5



	MODEL	Male Thread T	DIMENSIONS(mm)			
			L	H	A	ØB
	M13-M2	1/8" NPT	69.6	19	10	5
	M13-M4	1/4" NPT	79.6	19	13	7.5
	M13-M6	3/8" NPT	80.6	19	14	10.5
	M13-M8	1/2" NPT	82.6	21	16	12



	MODEL	Hose Barb T	DIMENSIONS(mm)			
			L	H	A	ØB
	M13-T4	1/4"	89.1	19	22.5	4
	M13-T5	5/16"	89.1	19	22.5	6
	M13-T6	3/8"	94.8	19	28.2	7.5
	M13-T8	1/2"	98.1	19	31.5	9



	MODEL	Hose T	DIMENSIONS(mm)			
			L	H	A	ØB
	M13-H4	1/4"	95.1	19	28.5	4.5
	M13-H5	5/16"	96.6	19	30	6
	M13-H6	3/8"	98.1	19	31.5	7.5
	M13-H8	1/2"	99.6	19	33	9



	MODEL	Hose T	DIMENSIONS(mm)				
			L	H1	H2	A	ØB
	M13-P4	4 x 6	78.6	19	12	12	3
	M13-P5	5 x 8	83	19	14	16.4	4
	M13-P6	6.5 x 10	85.1	19	16	18.5	5
	M13-P8	8 x 12	84.1	19	17	17.5	6.5

M SERIES (MILTON / INDUSTRIAL) BALL-SWIVEL PLUG

- 360-degree rotation
- Free rotation angle up to 27 degrees
- Single swivel point for smooth movement
- Compatible with M-Series couplers (M32, M21)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
M12-F2	1/8" NPF	58.2	19	12
M12-F4	1/4" NPF	60.2	19	14
M12-F6	3/8" NPF	61.2	21	15
M12-F8	1/2" NPF	62.7	24	16.5



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
M12-M2	1/8" NPT	59.7	19	10	5
M12-M4	1/4" NPT	62.7	19	13	7.5
M12-M6	3/8" NPT	63.7	19	14	10.5
M12-M8	1/2" NPT	65.7	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M12-T4	1/4"	73.2	19	22.5	4
M12-T5	5/16"	73.2	19	22.5	6
M12-T6	3/8"	78.9	19	28.2	7.5
M12-T8	1/2"	82.2	19	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M12-H4	1/4"	79.2	19	28.5	4.5
M12-H5	5/16"	80.7	19	30	6
M12-H6	3/8"	82.2	19	31.5	7.5
M12-H8	1/2"	83.7	19	33	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
M12-P4	4 x 6	62.7	19	12	12	3
M12-P5	5 x 8	67.1	19	14	16.4	4
M12-P6	6.5 x 10	69.2	19	16	18.5	5
M12-P8	8 x 12	68.2	19	17	17.5	6.5

M SERIES (MILTON / INDUSTRIAL) SWIVEL PLUG

- Smooth 360-degree parallel rotation for effortless operation
- Compatible with M-Series couplers (M32, M21)



MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
M11-F2	1/8" NPF	50.2	17	12
M11-F4	1/4" NPF	52.2	17	14
M11-F6	3/8" NPF	54.2	21	15
M11-F8	1/2" NPF	56.2	24	16.5



MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
M11-M2	1/8" NPT	46.2	14	10	5
M11-M4	1/4" NPT	49.2	14	13	7.5
M21-M6	3/8" NPT	50.2	17	14	10.5
M11-M8	1/2" NPT	52.2	21	16	12



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M11-T4	1/4"	58.7	15	22.5	4
M11-T5	5/16"	58.7	15	22.5	6
M11-T6	3/8"	64.4	15	28.2	7.5
M11-T8	1/2"	67.7	18	31.5	9



MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M11-H4	1/4"	64.7	15	28.5	4.5
M11-H5	5/16"	66.2	15	30	6
M11-H6	3/8"	67.7	15	31.5	7.5
M11-H8	1/2"	69.2	18	33	9




MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
M11-P4	4 x 6	52	17	12	12	3
M11-P5	5 x 8	55	17	14	15	4
M11-P6	6.5 x 10	58.5	17	16	18.5	5
M11-P8	8 x 12	57.5	19	17	17.5	6.5

M SERIES (MILTON / INDUSTRIAL) STANDARD PLUG


- Compatible with M-Series couplers (M32, M21)




MODEL	Female Thread T	DIMENSIONS(mm)		
		L	H	A
M10-F2	1/8" NPF	38.5	17	12
M10-F4	1/4" NPF	40	17	14
M10-F6	3/8" NPF	41	21	15
M10-F8	1/2" NPF	44	24	16.5




MODEL	Male Thread T	DIMENSIONS(mm)			
		L	H	A	ØB
M10-M2	1/8" NPT	40.5	14	10	5
M10-M4	1/4" NPT	43.5	14	13	7.5
M10-M6	3/8" NPT	45	17	14	10.5
M10-M8	1/2" NPT	48	21	16	12




MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M10-T4	1/4"	53	15	22.5	4
M10-T5	5/16"	53	15	22.5	6
M10-T6	3/8"	59.2	15	28.2	7.5
M10-T8	1/2"	62.5	18	31.5	9






MODEL	Hose Barb T	DIMENSIONS(mm)			
		L	H	A	ØB
M10-H4	1/4"	49.5	15	22.5	4
M10-H5	5/16"	53.5	15	22.5	6
M10-H6	3/8"	57	15	28.2	7.5
M10-H8	1/2"	60.5	18	31.5	9



MODEL	Hose T	DIMENSIONS(mm)				
		L	H1	H2	A	ØB
M10-P2	4 x 6	42	14	12	12	3
M10-P4	5 x 8	47.4	14	14	16.4	4
M10-P6	6.5 x 10	49.5	16	16	18.5	5
M10-P8	8 x 12	48.5	17	17	17.5	6.5



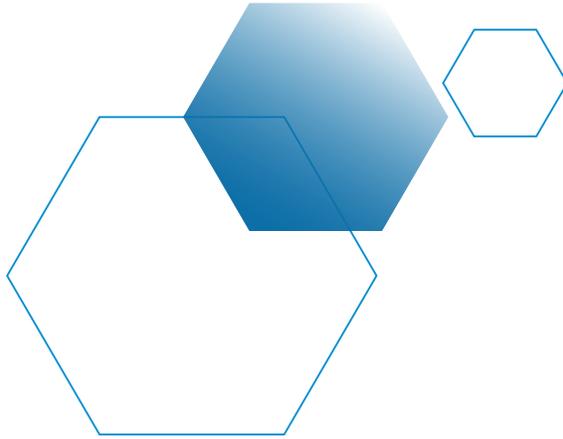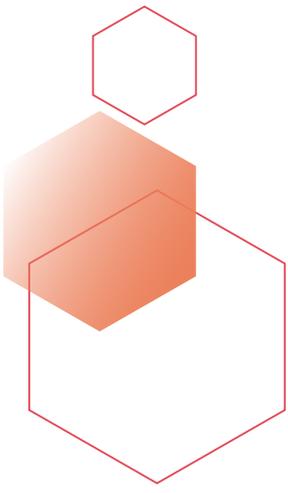

LEOUYN

LEOU YN ENTERPRISE CO., LTD.(AURAX)

Vat NO. 89349123

Tel +886-6-5713379

Web www.leouyn-coupler.com.tw

Fax +886-6-5722299

Mail service@leouyn-coupler.com.tw

Address No. 5-5, Liaoziyu, Madou Dist., Tainan City 721, Taiwan



WEB



LINE



WHATSAPP